



CONTOUR SERIES



TILE + PLANK

NUGRAIN
STERLING NU 3712-C
6" x 36" and 6" x 18" Random Installation

Tandus | Centiva
A Tarkett Company



CONTOUR SERIES

NUGRAIN
STERLING NU 3712-C, GUNMETAL NU 3710-C,
PRIMA NU 3717-C
4" x 36", 6" x 36", 7.2" x 36", 4" x 18",
6" x 18", 7.2" x 36" Random Installation



TILE + PLANK



Tandus | Centiva



CONTOUR SERIES

NUGRAIN

STERLING NU 3712-C, VERMILIAN NU 3714-C,
PRIMA NU 3717-C

4" x 18" Herringbone Installation



Tandus | Centiva


THE ULTIMATE FLOORING EXPERIENCE

Tandus Centiva, a Tarkett company, creates innovative floorcovering solutions through our unique line of Powerbond®, Freeform®, Modular, Broadloom, Woven and LVT products. Each of our product platforms offer coordinated styles, extensive color ranges and a variety of patterns and textures that enhance the appearance of any commercial environment. Tandus Centiva products are also designed to coordinate with our MetalEdge Collection transition, providing the Ultimate Flooring Experience.



THE ULTIMATE
FLOORING EXPERIENCE

PRODUCT COORDINATES - SOFT SURFACE

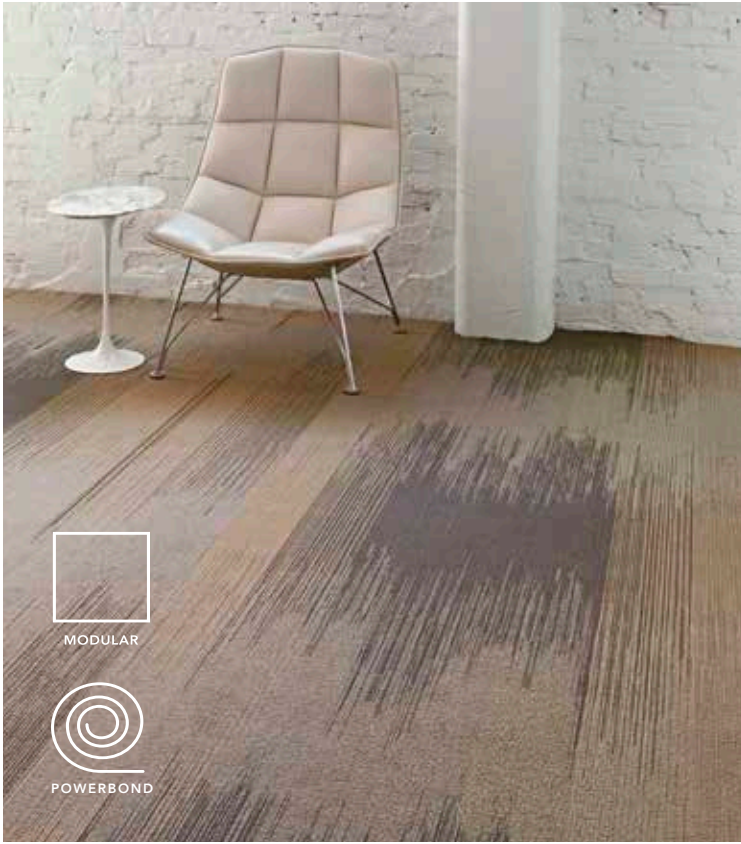

CHANGE II



FACTORY FLOOR II



GRAMA II



FULL VOLUME III

PRODUCT COORDINATES – TRANSITION: METAEDGE COLLECTION

MetalEdge transition provides a transition solution and finish detail for any commercial space. The following colors have been selected to coordinate with a variety of Tandus Centiva LVT and soft surface products. Please contact your Tandus Centiva account executive for details.



STEEL 00179*



IRONSTONE 00178*



BLACK PEARL 00082*



BRASS 00176*

**These colors are metallic and may not be accurately represented. Please contact your Tandus Centiva account executive to order samples, 800.248.2878.*

NUGRAIN



TILE + PLANK

SPECIFICATIONS

Classification:	ASTM F1700 Class III Type B
Total Thickness:	0.120" (3.0 mm)
Wear Layer Thickness:	32 mil (0.8 mm)
Edge Treatment:	Square (SE) or Slight Bevel (SB)
Emboss:	Tick (TK) recommended as shown. Additional embosses available.
Warranty:	20 Year Limited Commercial Wear Warranty
Colors:	8

SIZES	4"x 36" (10.16 cm x 91.44 cm)	45 planks per ctn 45 sq. ft. per ctn	45 lbs. per ctn
	6"x 36" (15.24 cm x 91.44 cm)	24 planks per ctn 36 sq. ft. per ctn	36 lbs. per ctn
	7.2"x 48" (18.29 cm x 121.92 cm)	15 planks per ctn 36 sq. ft. per ctn	36 lbs. per ctn
	12"x 12" (30.48 cm x 30.48 cm)	45 tiles per ctn 45 sq. ft. per ctn	45 lbs. per ctn
	18"x 18" (45.72 cm x 45.72 cm)	20 tiles per ctn 45 sq. ft. per ctn	45 lbs. per ctn

For additional size options contact your Tandus Centiva LVT representative.

TESTING

Flexibility:	ASTM F137	Passes
Dimensional Stability:	ASTM F2199	Passes
Static Load:	ASTM F970	Passes
Residual Indentation:	ASTM F1914	Excellent
Flammability:	ASTM E648	CRF ≥ 0.45 watts/cm ² NFPA Class 1
Slip Resistance:	ASTM D2047	Passes <450 D ^{MC}
Smoke Density:	ASTM E662	Passes
Resistance to Light:	ASTM F1515	Excellent
Chemical Resistance:	ASTM F925	Excellent
Resistance to Heat:	ASTM F1514	Excellent

ENVIRONMENTAL DATA

Recycled Content:	13.8% - 27.5% Preconsumer	
Materials:	Non-phthalate Plasticizers; No Heavy Metals; Non-Toulene Ink System	
Indoor Air Quality:	Meets CDPH 01350; FloorScore® Certification	
Recyclability:	100% Recyclable through our ReStart® Program	
LEED Scoreboard:	LEED 2009	LEED v4
	MRC2 Construction Waste Management	MRC2 Building Product Disclosure and Optimization – Environmental Product Declarations
	MRC4 Recycled Content	MRC3 Building Product Disclosure and Optimization – Sourcing of Raw Materials
	MRC5 Regional Materials	MRC5 Construction and Demolition Waste Management
	IEQ 4.1 Low-Emitting Adhesives	IEQc2 Low-Emitting Materials
	IEQ 4.3 Low-Emitting Materials Flooring	
Manufacturing:	Made in the USA ISO 9001 Quality Management System ISO 14001 Environmental Management System OHSAS 18001 Occupational Health and Safety Management System	
Packaging:	Packaged in recycled, corrugated cardboard	



For samples, warranties and more information,
visit tandus-centiva.com or call 800.248.2878.

Tandus | Centiva
A Tarkett Company